

**NEW!**

ENGINE

Model	: ISUZU GI-4HK1X
Type	: Water-cooled, 4 cycle, 4 cylinders, line type direct injection, turbocharger, intercooler, electronic diesel engine
Power	: 161 HP (120 kW) @2000 rpm / SAE J1995 (Gross) : 151 HP (113 kW) @2000 rpm / SAE J1349 (Net)
Max. Torque	: 657 Nm @1500 rpm (Gross)
Displacement	: 5193 cc
Bore and Stroke	: 115 mm x 125 mm
Emission Class	: R96 (Stage-IIIa)

UNDERCARRIAGE

X Type Lower Frame Construction Pentagon Box Type Chassis

Shoe	: Triple grouser
No. Of Shoes	: 2 x 49
No. Of Lower Rollers	: 2 x 9
No. Of Upper Rollers	: 2 x 2
Track Tensioning	: Hydraulic Spring Tensioning

CAB

• Improved operator's all round visibility
• Increased cabin internal space
• Use of six viscomount cabin mountings that dampen the vibrations
• High capacity A/C
• High resolution, led backlight, color LCD display
• Opera Control System
• Cooled storage room
• Glass holder, book and object storage pockets
• Pool type floor mat
• Improved operator's comfort through versatile adjustable seat
• Ergonomically redesigned cabin through relocated switch board, and re-styled travel pedals and joysticks.

SWING SYSTEM

Swing Motor	: Axial piston type integrated with shock absorber valves
Reduction	: 2 stage planetary gear box.
Swing Brakes	: Hydraulic multi disc type, automatic warnings
Swing Speed	: 11,9 rpm

TRAVEL AND BRAKERS

Travel	: Fully hydrostatic
Travel Motors	: Axial piston type
Reduction	: 2 stage planetary gear
Travel Speed	
High Speed	: 5,8 km/h
Low Speed	: 3,8 km/h
Max. Drawbar Pull	: 18.365 kgf
Gradeability	: 35° (%70)
Parking Brake	: Hydraulic multi disc type
Ground Pressure (600mm Shoe)	: 0,50 kgf/cm ²

HYDRAULIC SYSTEM

Main Pump	
Type	: Double variable displacement axial piston pumps
Max. Flow	: 2 x 221 L/min
Pilot Pump	: Gear, 20 L/min
Relief Valves	
Attachment	: 350 kgf/cm ²
Power Boost	: 370 kgf/cm ²
Travel	: 350 kgf/cm ²
Swing	: 306 kgf/cm ²
Pilot	: 40 kgf/cm ²
Cylinders	
Main Boom	: 2 x ø 120 x ø 85 x 1.300 mm
Stick Cylinder	: 1 x ø 135 x ø 95 x 1.520 mm
Bucket Cylinder	: 1 x ø 120 x ø 85 x 1.060 mm

OPERA CONTROL SYSTEM

• Easy-to-use control panel and menu	• Maintenance information and warning system
• Improved fuel economy and productivity	• Automatic powershift to improve performance
• Maximum efficiency by selection of power and work modes	• Selection of multi-language on control panel.
• Overheat prevention and protection system without interrupting the work	• Real time monitoring of operational parameters such as pressure, temperature, engine load
• Automatic powerboost switch-on and switch-off	• Anti-theft system with personal code
• Automatic electric power-off	• Possibility to register 27 different operating hours
• Maintenance information and warning system	• Rear-view, arm-view camera (Optional)
• Error mode registry and warning system	• HIDROMEK Smartlink (Optional)
• Ability to adjust hydraulic flow from Opera screen	

CAPACITY

Fuel Tank	: 405 L	Engine Cooling System	: 33 L
Hydraulic Tank	: 152 L	Engine Oil	: 20 L
Hydraulic System	: 285 L		

ELECTRICAL SYSTEM

Voltage	: 24 V
Battery	: 2 x 12 V / 100 Ah
Alternator	: 24 V / 50 A
Starting Motor	: 24 V / 5 kW


LUBRICATION

Centralized lubrication system is provided for lubrication all difficult-to-reach parts on the components, such as boom and arm

OPERATING WEIGHT

Standard machine operating weight	: 23.400 kg
-----------------------------------	-------------


Operational weight, complying with the ISO 6016 standards, includes full fuel tank, hydraulic system and other liquids, 75kg operator weight and standard equipped machine weight. Optional equipments are not included.

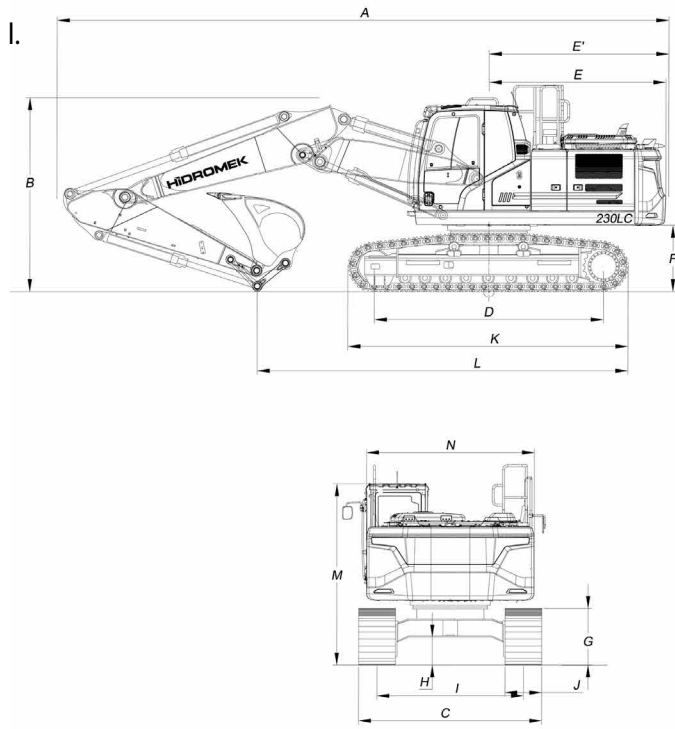

I. GENERAL DIMENSIONS

Boom Dimension	5.600 mm
Arm Dimension	*2.920 mm
A - Overall Length	9.590 mm
B - Boom (Shipping) Height	3.090 mm
C - Lower Frame Width	2.990 mm
D - Track Base Length	3.640 mm
E - Counterweight Distance	2.810 mm
E' - Counterweight Turning Radius	2.850 mm
F - Upper Chassis to Ground Clearance	1.065 mm
G - Crawler Height	935 mm
H - Ground Clearance	465 mm
I - Track Gauge	2.390 mm
J - Shoe Width	600 mm
K - Lower Chassis Length (from shoe)	4.460 mm
L - Shipping Length	5.340 mm
M - Cab Height	3.010 mm
N - Upper Frame Width	2.740 mm

* Standard

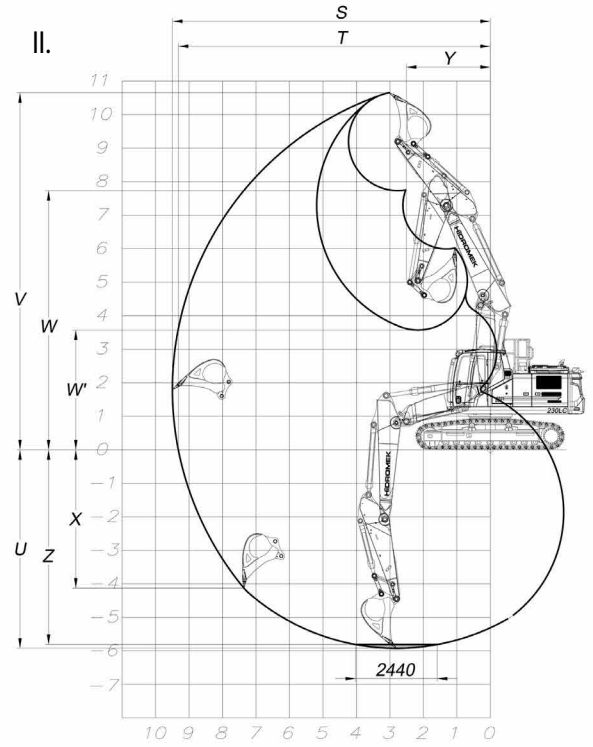

II. WORKING DIMENSIONS

Boom Dimension	5.600 mm
Arm Dimension	*2.920 mm
S - Maximum Reach Distance	9.920 mm
T - Maximum Reach at Ground Level	9.750 mm
U - Maximum Digging Depth	6.400 mm
V - Maximum Digging Height	10.900 mm
W - Maximum Unloading Height	8.000 mm
W' - Minimum Unloading Height	3.000 mm
X - Maximum Vertical Wall Digging Depth	5.070 mm
Y - Minimum Swing Radius	2.440 mm
Z - Maximum Digging Depth (2440 mm level)	6.300 mm

* Standard

III. DIGGING PERFORMANCE

Standard Bucket Capacity (SAE)	1,10 m ³
Bucket Digging Force (Power Boost) ISO	15.100 (15.900) kgf
Arm Crowd Force (Power Boost) ISO	10.400 (11.000) kgf



HİDROMEK®

FACTORY - HEAD OFFICE

Ahi Evran OSB Mahallesi Osmanlı Caddesi No:1 06935 Sincan / ANKARA / TÜRKİYE
Tel: (+90) 312 267 12 60 Fax: (+90) 312 267 12 39
www.hidromek.com

Notice:

Hidromek has the right to modify the specifications and design of the model indicated on this brochure without prior notice.