

**NEW!**

## ENGINE

Model	: ISUZU-AI-4HK1X
Type	: Water cooled diesel engine, 4 cycles, 4 cylinders, line-type, direct injection, turbocharger and intercooler
Power	: 172 HP (128 kW) @2000 rpm / SAE J1995 (Gross) : 162 HP (121 kW) @2000 rpm / SAE J1349 (Net)
Max. Torque	: 677 Nm @1500 rpm (Gross) : 656 Nm @1500 rpm (Net)
Displacement	: 5193 cc
Bore and Stroke	: 115 mm x 125 mm
Emission Class	: Stage IIIA / Tier 3 (EU/EPA)

## LOWER STRUCTURE (CHASSIS)

Chassis	: Box shaped, reinforced lower chassis, front dozer blade and rear outriggers (stabilizers) as standard figures.
Axles	: The pivot pin mounted front axle allows two options: 8° in each direction for best matching conditions, or could be locked at any desired position for perfect stability.
Tires	: 11,00 - 20 (16 pr)

## CAB

- Improved operator's all round visibility
- Increased cabin internal space
- Use of six viscomount cabin mountings that dampen the vibrations
- High capacity A/C
- 8" touch TFT screen
- Opera Control System
- Cooled storage room
- Glass holder, book and object storage pockets
- Pool type floor mat
- Improved operator's comfort through versatile adjustable seat

## STEERING SYSTEM

The "orbitrol" type steering system controls a steering cylinder located on the front axle. Minimum turning radius is 6.800 mm.

## TRAVEL AND BRAKES

Travel	: Fully hydrostatic
Travel Motors	: Axial piston type
Reduction	: 2 stage planetary gear
Travel Speed	
High Speed	: 31 km/h
Low Speed	: 7,5 km/h
Max. Drawbar Pull	: 11.120 kgf
Gradeability	: 29° (%56)
Parking Brake	: Hydraulic, disc type with automatic warning
Service Brake	: Fully hydraulically operating disc type brakes with spring return, independent for front and rear axles.

## LUBRICATION

Centralized lubrication system is provided for lubrication all difficult-to-reach parts on the components, such as boom and arm

## HYDRAULIC SYSTEM

Main Pump	
Type	: 2 axial piston type pumps with double variable displacement and inclined plate
Max. Flow Rate	: 2 x 233 L/min
Pilot Pump	: Gear type, 20,5 L/min
Working Pressures	
Cylinders	: 350 kgf/cm <sup>2</sup>
Power Boost	: 370 kgf/cm <sup>2</sup>
Travel	: 370 kgf/cm <sup>2</sup>
Swing	: 306 kgf/cm <sup>2</sup>
Pilot	: 40 kgf/cm <sup>2</sup>
Cylinders	
Boom	: 2 x ø 120 x ø 85 x 1.300 mm
Arm	: 1 x ø 135 x ø 95 x 1.520 mm
Bucket	: 1 x ø 120 x ø 85 x 1.060 mm

## OPERA CONTROL SYSTEM

- Easy-to-use control panel and menu
- Improved fuel economy and productivity
- Maximum efficiency by selection of power and work modes
- Overheat prevention and protection system without interrupting the work
- Automatic powerboost switch-on and switch-off
- Automatic electric power-off
- Maintenance information and warning system
- Error mode registry and warning system
- Ability to adjust hydraulic flow from Opera screen
- Maintenance information and warning system
- Automatic powershift to improve performance
- Selection of multi-language on control panel.
- Real time monitoring of operational parameters such as pressure, temperature, engine load
- Anti-theft system with personal code
- Possibility to register 27 different operating hours
- Rear-view, arm-view camera (Optional)
- Hidromek Smartlink (Optional)

## SWING SYSTEM

Swing Motor	: Axial piston type integrated with shock absorber valves
Reduction	: 2 stage planetary gear box.
Swing Brakes	: Hydraulic multi disc type.
Swing Speed	: 11,90 rpm

## FILLING CAPACITIES

Fuel Tank	: 345 L	Engine Oil	: 22 L
Hydraulic Tank	: 160 L	Engine Cooling Sys.	: 33 L
Hydraulic System	: 318 L		


## ELECTRICAL SYSTEM

Voltage	: 24 V
Battery	: 2 x 12 V x 100 Ah
Alternator	: 24 V / 50 A
Starting Motor	: 24V / 5,0 kW

## OPERATING WEIGHT

Standard machine operating weight : 22.950 kg


Operational weight, complying with the ISO 6016 standards, includes full fuel tank, hydraulic system and other liquids, 75kg operator weight and standard equipped machine weight. Optional equipments are not included.

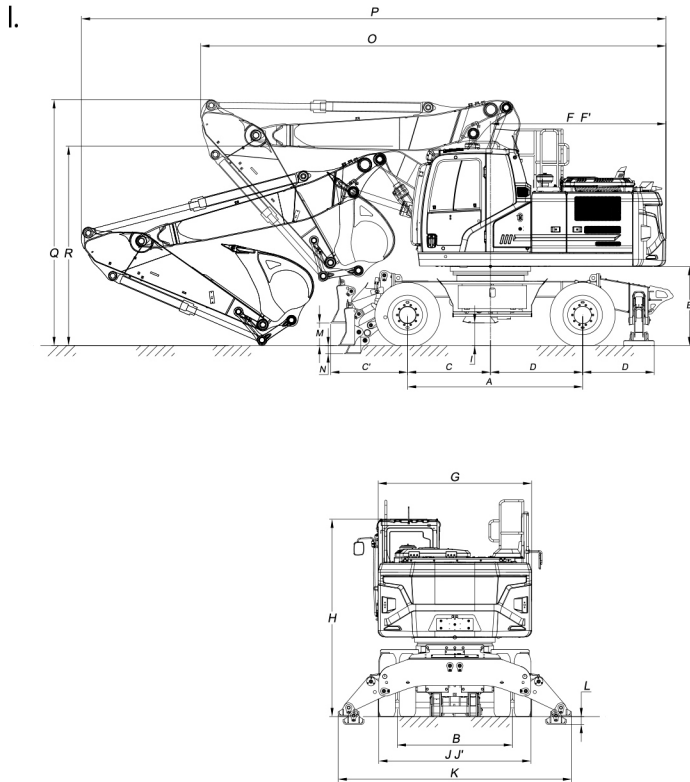

## I. GENERAL DIMENSIONS

Boom Dimension	5.500 mm	
Arm Dimension	*2.400 mm	2.920 mm
A Axle Distance	2.850 mm	
B Track Gauge	1.914 mm	
C Swing-centre to Front Axle	1.500 mm	
C' Front overhang	1.242 mm	
D Swing-centre to Rear Axle	1.350 mm	
D' Rear overhang	1.153 mm	
E Counterweight clearance	1.294 mm	
F Distance from center of swing to rear end	2.855 mm	
F' Tail Swing Radius	2.885 mm	
G Overall Width of upperstructure	2.500 mm	
H Overall height of cab	3.220 mm	
I Minimum Ground Clearance, Outrigger	348 mm	
I' Minimum Ground Clearance	384 mm	
J Overall Width tires	2.540 mm	
J' Overall width of Outrigger retract	2.550 mm	
K Overall Width Outrigger extend	3.791 mm	
L Max. Outrigger lower	117 mm	
M Dozer Blade Ground Clearance	353 mm	
N Max. Dozer Blade Lower	123 mm	
O Overall Length / Travel	8.385 mm	8.765 mm
P Overall Length / Transport	9.510 mm	9.925 mm
Q Boom Height / Travel	3.985 mm	3.690 mm
R Boom Height / Transport	3.185 mm	3.220 mm

\* Standard

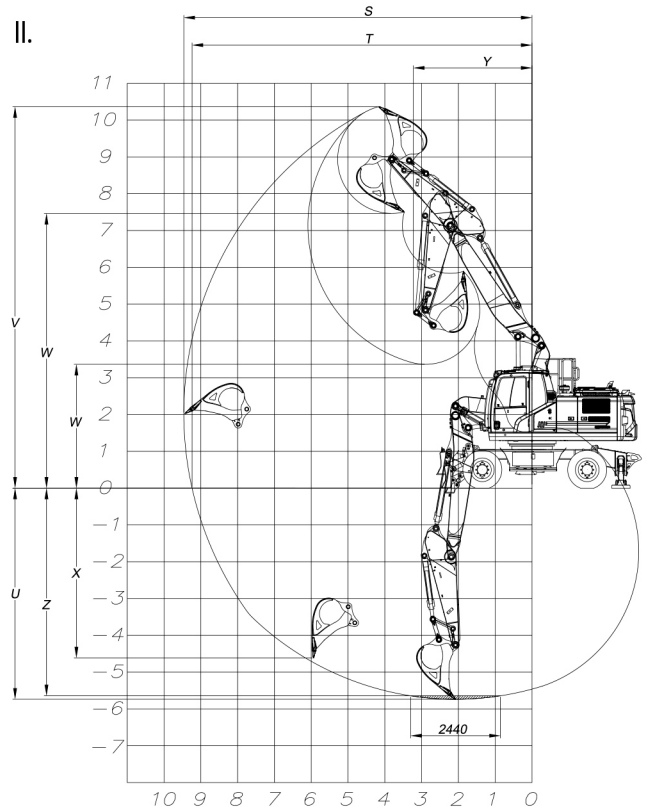

## II. WORKING DIMENSIONS

Boom Dimension	5.500 mm	
Arm Dimension	*2.400 mm	2.920 mm
S Maximum Digging Reach	9.460 mm	9.910 mm
T Maximum Digging Reach at Ground Level	9.240 mm	9.700 mm
U Maximum Digging Depth	5.740 mm	6.240 mm
V Maximum Digging Height	10.360 mm	10.560 mm
W Maximum Dumping Height	7.460 mm	7.690 mm
W' Minimum Dumping Height	3.360 mm	2.800 mm
X Maximum Vertical Digging Depth	4.630 mm	5.000 mm
Y Minimum Swing Radius	3.230 mm	3.130 mm
Z Maximum Digging Depth (2440 mm level)	5.640 mm	6.150 mm

\* Standard

## DIGGING PERFORMANCE

Standard Bucket Capacity (SAE)	0,9 m <sup>3</sup>
Bucket Digging Force (Power Boost) ISO	14.900 (15.800) kgf
Arm Crowd Force (Power Boost) ISO	11.800 (12.500) kgf